
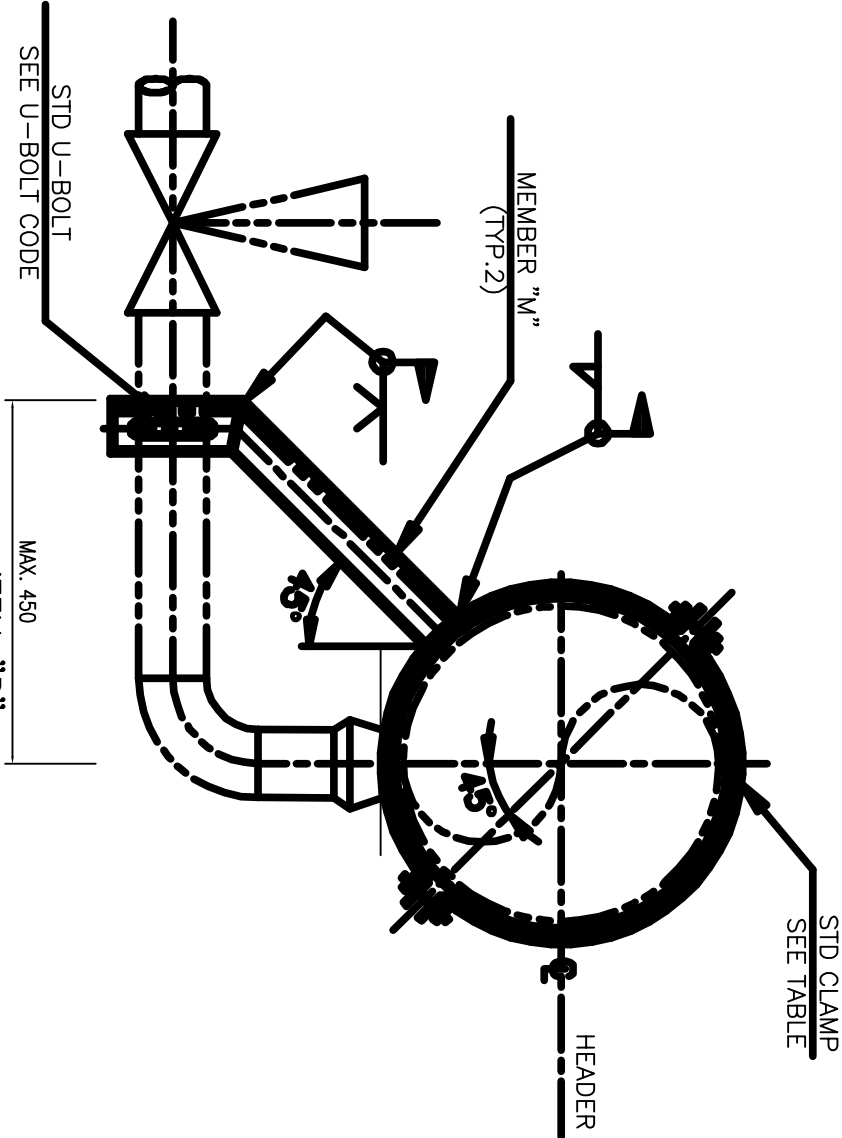


- 1-THE ISOLATOR SHALL BE BONDED ONLY ON THE INSIDE OF CLAMPS.
- 2-ALL GUSSET SUPPORTS SHALL BE FIELD ADJUSTED AND INSTALLED


SG-01-(1)-(2)-(3)

- 1- ITEM TYPE
- 2- HEADER SIZE
- 3- NPS MARK

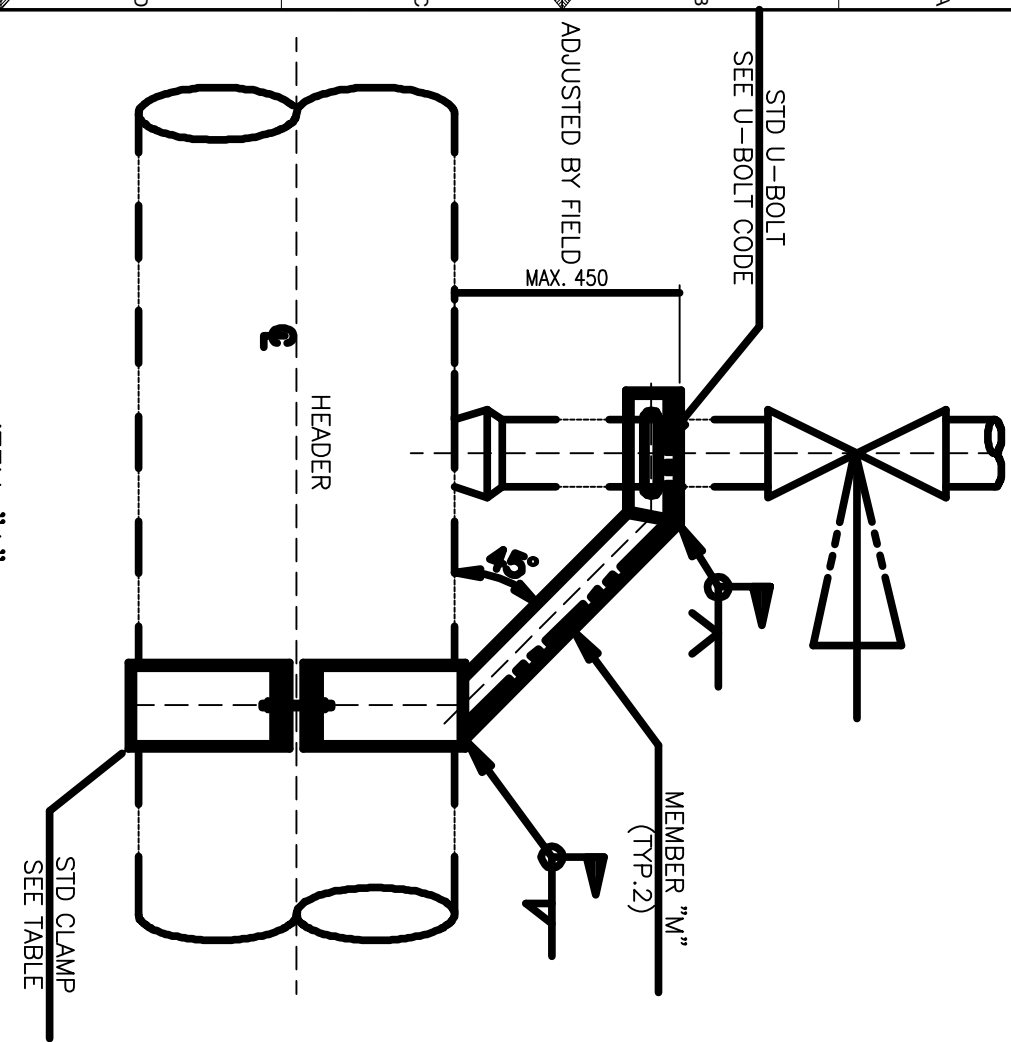

ITEM "A"

ITEM "B"

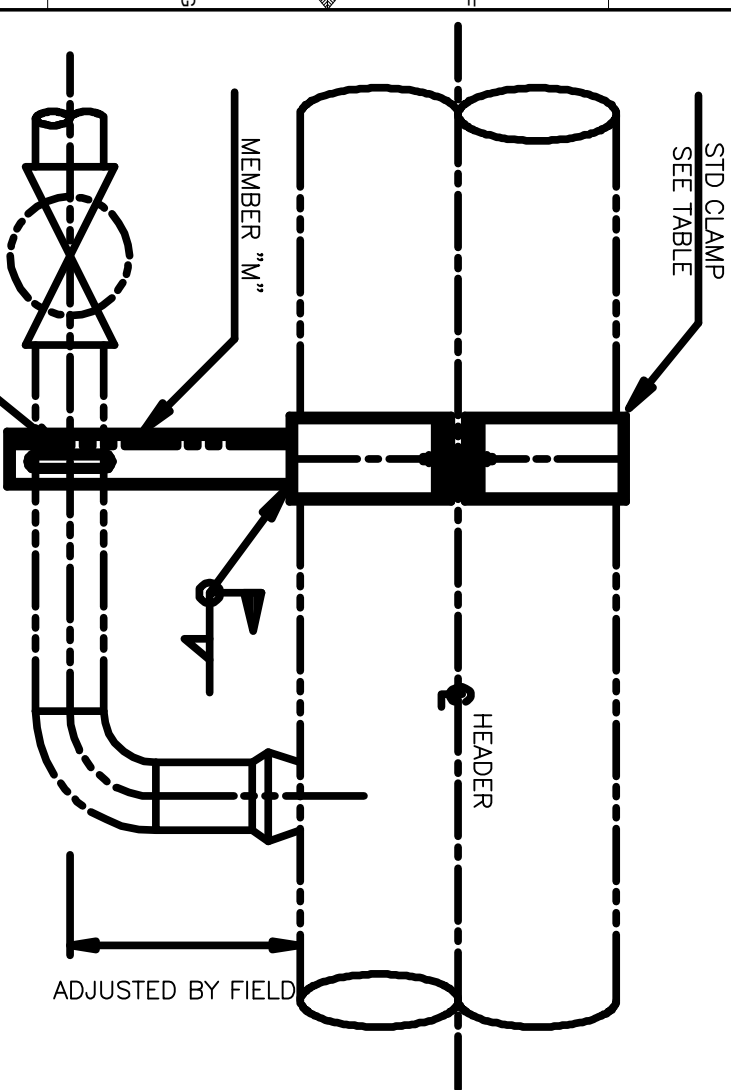

STD CLAMP  
SEE TABLE

HEADER

MEMBER "M"

ADJUSTED BY FIELD

STD U-BOLT  
SEE U-BOLT TYPE

ITEM "C"

NPS MARK	PIPE SIZE	
	NPS	DN
0A	1/2"	15
0B	3/4"	20
01	1"	25
1A	1 1/2"	40
02	2"	50
03	3"	80
04	4"	100
06	6"	150
08	8"	200
10	10"	250
12	12"	300
14	14"	350
16	16"	400
18	18"	450
20	20"	500
24	24"	600

MEMBER "M"	
HEADER SIZE (NPS)	MEMBER
4" & BELOW	L25X25X5
6" & ABOVE	L50X50X6

00	5.6.2024	ISSUED FOR REVIEW	F.NoordinMajid	M.A.H	L.Zeyniddin
Rev.	Date	PURPOSE OF ISSUE	Prepared	Checked	Approved
					Authorized

COMPANY:

شركة توسعة آهن و فولاد گل گهر  
G.I.S.D.Co.

GISDco.

INTERNAL PROCEDURE

DRAWING TITLE:

STANDARD FOR PIPE SUPPORT DRAWING

Contract No.	Document No.	Class	Rev.	Size	Scale	Sheet No.